

INSTALLATION INSTRUCTIONS

Windshield Pod

2650-1160



Windshield Pod Directions:

Read directions before starting installation

Part# (Dual 18016), (Triple 18017), (Quad 18018)

Fits 99-04 Ford Super Duty and 03-05 Dodge Ram

- 1) Apply Velcro to rear of Pod as shown in. (photo 1)
- 2) Clean window area where Velcro attaches.
- 3) Install gauges and wiring into pod.
- 4) Peel backing off Velcro.

Note: In steps 5 and 6 be careful not to let Velcro touch windshield.

- 5) Insert top edge of pod back into the space between the windshield and the metal roof edge, located under the headliner.

- 6) Feed wiring under headliner for several inches and slide pod into position above rear view mirror. (Photo 2 and 3)

- 7) Push pod firmly up against the head liner.

- 8) With pod firmly against head liner, press bottom of pod against windshield, apply firm pressure to bond Velcro to window.

Note: Hold firm pressure for at least one minute.

Continue running wiring under headliner and down a-pillar.



(Photo 1)



(Photo 2)



(Photo 3)

Auto Meter Gauge Works Three Year Limited Warranty

Gauge Works warrants to the consumer that all Auto Meter Gauge Works products will be free from defects in material and workmanship. Products that fail will be repaired or replaced at Auto Meter Gauge Works' option to the consumer, when determined by Auto Meter Gauge Works that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter Gauge Works Product and the necessary labor done by Auto Meter Gauge Works to effect the repair or replacement of the Auto Meter Gauge Works product. In no event shall this warranty exceed the original purchase price of the Auto Meter Gauge Works product nor shall Auto Meter Gauge Works be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter Gauge Works must be transportation prepaid and accompanied with proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. Improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Gauge Works disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter Gauge Works. This warranty is made solely by Gauge Works with Auto Meter being the agent to contact for warranty claims. If the partnership between Auto Meter and Gauge Works dissolves, then all warranty adjustments will be covered by the Gauge Works Co.

FOR SERVICE CONTACT: AUTO METER PRODUCTS Inc. 413 W. Elm St., Sycamore, IL 60178 USA (815)899-0801 or
Email us at service@autometer.com

© 2006 Auto Meter Products, Inc.

2650-1160 6/12/06

INSTALLATION INSTRUCTIONS

Windshield Pod

2650-1160



Windshield Pod Directions:

Read directions before starting installation

Part# (Dual 18016), (Triple 18017), (Quad 18018)

Fits 99-04 Ford Super Duty and 03-05 Dodge Ram

- 1) Apply Velcro to rear of Pod as shown in. (photo 1)
- 2) Clean window area where Velcro attaches.
- 3) Install gauges and wiring into pod.
- 4) Peel backing off Velcro.

Note: In steps 5 and 6 be careful not to let Velcro touch windshield.

- 5) Insert top edge of pod back into the space between the windshield and the metal roof edge, located under the headliner.


- 6) Feed wiring under headliner for several inches and slide pod into position above rear view mirror. (Photo 2 and 3)

- 7) Push pod firmly up against the head liner.

- 8) With pod firmly against head liner, press bottom of pod against windshield, apply firm pressure to bond Velcro to window.

Note: Hold firm pressure for at least one minute.

Continue running wiring under headliner and down a-pillar.

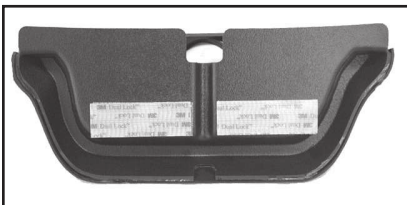

(Photo 1)



(Photo 2)



(Photo 3)

Auto Meter Gauge Works Three Year Limited Warranty

Gauge Works warrants to the consumer that all Auto Meter Gauge Works products will be free from defects in material and workmanship. Products that fail will be repaired or replaced at Auto Meter Gauge Works' option to the consumer, when determined by Auto Meter Gauge Works that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter Gauge Works Product and the necessary labor done by Auto Meter Gauge Works to effect the repair or replacement of the Auto Meter Gauge Works product. In no event shall this warranty exceed the original purchase price of the Auto Meter Gauge Works product nor shall Auto Meter Gauge Works be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter Gauge Works must be transportation prepaid and accompanied with proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. Improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Gauge Works disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter Gauge Works. This warranty is made solely by Gauge Works with Auto Meter being the agent to contact for warranty claims. If the partnership between Auto Meter and Gauge Works dissolves, then all warranty adjustments will be covered by the Gauge Works Co.

FOR SERVICE CONTACT: AUTO METER PRODUCTS Inc. 413 W. Elm St., Sycamore, IL 60178 USA (815)899-0801 or
Email us at service@autometer.com

© 2006 Auto Meter Products, Inc.

2650-1160 6/12/06